

c2JpbGV0c2t5aTsyMDIxLTA2LTAyVDEzOjAzOjUwLjMyMlo7MTg1LjIxMC44Ni4yMjtTQUxDQTJCTjFKSDc1OTUwOA==

# C11PD1 : Engine compartment harness to engine harness

**Connector Face**

Click to toggle focus

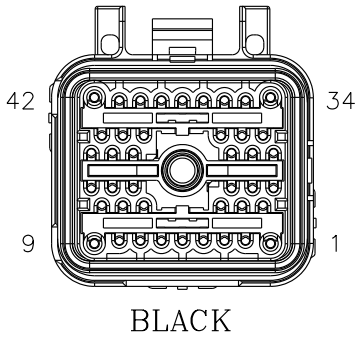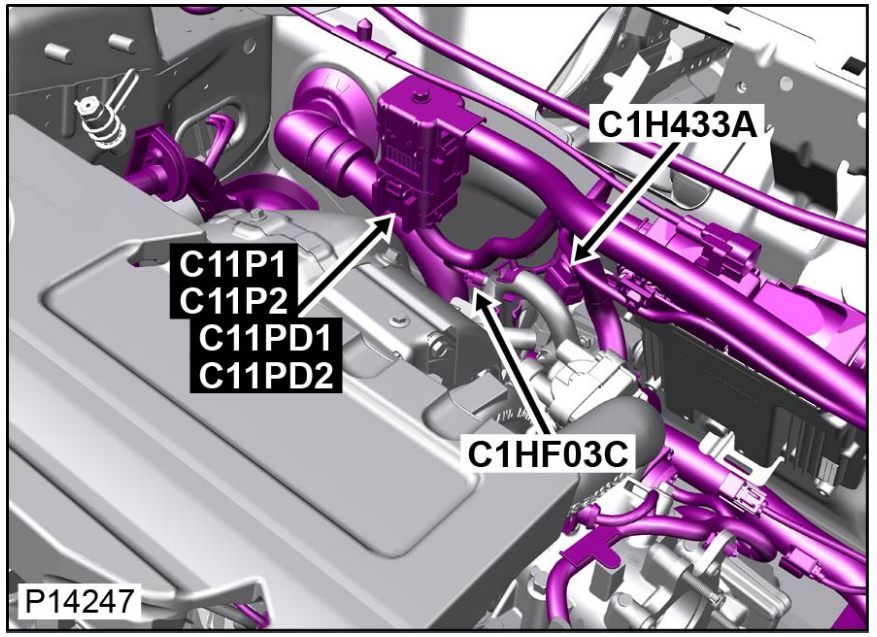


| Connector |
|---|
| C11P2 |
| C1HF03C |
| C11P1 |
| C11PD1 |
| C11PD2 |
| C1H433A |

**Housing** **Serviceable** **Overlay not available**

**Engineering Part Number** DK5T-14A464-AAA-407

**Service Part Number** LR094311

**Colour** BLACK

**Cavities** 42

**Harness** ENGINE COMPARTMENT LH HARNESS

**Description** Engine compartment harness to engine harness

**Location** Rear of engine compartment

## Wire chart and service repair kit information

| CAV | CSA | COL | CCT | DESTN | Pre-Terminated Lead | Extract Tool | Crimpers | Wire Stripper | Heat Shrink Sleeve | Ident Sleeve | Splice |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | 2.5 | WH | EN-U6+GBACQ | C1BB01A | 418-415 | 418-595 | 418-116A | 418-672 | 418-104 | 418-113 | 418-108 |
| 1 | 2.5 | BK | EN-U6+GBADB | BARE-END3 | 418-415 | 418-595 | 418-116A | 418-672 | 418-104 | 418-113 | 418-108 |
| 2 | 1.0 | GY-YE | EN-U6 | S1CBB08D | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 3 | 1.0 | GN-BN | EN-U6 | C1E107B | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |

| CAV | CSA | COL | CCT | DESTN | Pre-Terminated Lead | Extract Tool | Crimpers | Wire Stripper | Heat Shrink Sleeve | Ident Sleeve | Splice |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 4 | 0.5 | BU-BN | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 5 | 0.75 | BN | EN-U6 | S1BB11BD | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 6 | 0.5 | VT | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 7 | 0.5 | BK | EN-U6+DG2AA | BARE-END9 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 8 | 0.5 | BK | EN-U6+DG2AA | BARE-END10 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 9 | 4.0 | VT-GN | EN-U6+TR-XN+DECAU | C1BB01C | 418-507 | 418-595 | 418-116A | 418-672 | 418-105 | 418-114 | 418-109 |
| 9 | 2.5 | BK | EN-U6+(DECAB/TR-XM/TR-VU) | BARE-END4 | 418-415 | 418-595 | 418-116A | 418-672 | 418-104 | 418-113 | 418-108 |
| 10 | 0.5 | BU | TR-VU/TR-XM | C21D | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 10 | 1.5 | GY-RD | EN-U6+TR-XN | C21D | 418-461 | 418-595 | 418-116A | 418-672 | 418-104 | 418-113 | 418-108 |
| 11 | 0.5 | BK | EN-U6 | BARE-END11 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 12 | 0.5 | BK | EN-U6 | BARE-END12 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 13 | 0.75 | GY-BN | EN-U6 | C1BB01C | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 14 | 0.5 | YE-VT | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 15 | 0.5 | BK | EN-U6 | BARE-END23 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 16 | 0.5 | BU | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 17 | 0.5 | WH | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 18 | 0.5 | BU-WH | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 19 | 0.5 | GY-BU | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 20 | 0.5 | BN-WH | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 21 | 0.5 | VT | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 22 | 0.5 | BN | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 23 | 0.5 | BK | EN-U6 | BARE-END13 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 24 | 0.5 | GY-BN | EN-U6+TR-XN | C21D | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 24 | 0.5 | BK-GY | TR-VU/TR-XM | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 25 | 0.5 | VT-GY | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |

| CAV | CSA | COL | CCT | DESTN | Pre-Terminated Lead | Extract Tool | Crimpers | Wire Stripper | Heat Shrink Sleeve | Ident Sleeve | Splice |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 26 | 0.5 | BU | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 27 | 0.5 | GN-OG | EN-U6+TR-XN | C21D | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 27 | 0.5 | YE-GN | TR-VU/TR-XM | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 28 | 0.5 | BK | EN-U6+TR-XN | BARE-END5 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 28 | 0.5 | GN-VT | TR-VU/TR-XM | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 29 | 0.75 | BN-WH | TR-VU/TR-XM | C1E107B | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 29 | 0.5 | BK | EN-U6+TR-XN | BARE-END6 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 30 | 0.75 | VT-GY | EN-U6 | C1BB01C | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 31 | 0.75 | BN-GN | EN-U6+DG2AK | C1E107B | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 31 | 0.5 | BK | EN-U6+DG2AA | BARE-END7 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 32 | 0.75 | BN-BU | EN-U6+DG2AK | C1E107B | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 32 | 0.5 | BK | EN-U6+DG2AA | BARE-END8 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 33 | 1.0 | VT-OG | EN-U6 | C1BB01C | 418-444 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 34 | 2.5 | BN-BU | EN-U6+(DECAB/TR-XM/TR-VU) | S1BB15AA | 418-415 | 418-595 | 418-116A | 418-672 | 418-104 | 418-113 | 418-108 |
| 34 | 2.5 | BN-BU | EN-U6+TR-XN+DECAU | S1BB15AD | 418-415 | 418-595 | 418-116A | 418-672 | 418-104 | 418-113 | 418-108 |
| 35 | 0.5 | VT | EN-U6 | C21D | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 36 | 0.5 | GY | EN-U6 | C21D | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 37 | 0.5 | BK | EN-U6 | BARE-END22 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 38 | 0.5 | BK | EN-U6 | BARE-END21 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 39 | 0.5 | WH-VT | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 40 | 0.5 | GN-BN | EN-U6 | C1E107B | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 41 | 0.5 | BU-BN | EN-U6 | C1Y122 | 418-411-49 | 418-595 | 418-116A | 418-672 | 418-104 | 418-112 | 418-107 |
| 42 | 2.5 | BK | EN-U6 | S1D108BD | 418-415 | 418-595 | 418-116A | 418-672 | 418-104 | 418-113 | 418-108 |